




**PERFECT
FILTRATION**
S Y S T E M S

FINALLY!!! A RESERVOIR VENT FILTER THAT IS ACTUALLY A FILTER

ULTIMATE RESERVOIR VENT FILTER

The 3-micron depth-type filter element is designed to trap the solid contaminants and absorb the moisture as the tank and/or reservoir breathe. Can be used on fuel s, hydraulics, gear oils, turbine oils, and many more!

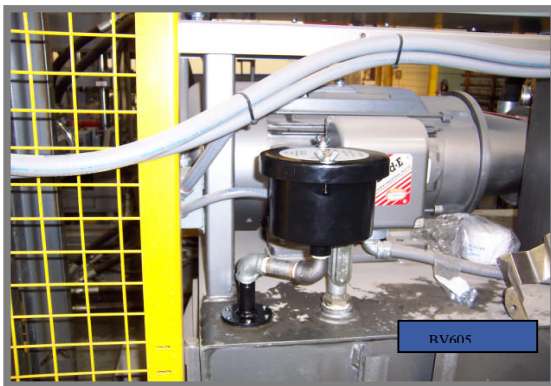

GREAT PRODUCT!

PRODUCT FEATURES & BENEFITS:

- * Removes water
- * Removes the majority of the solids
- * 3-micron depth-type filter element
- * Can be used on most tanks up to 5,000 gallons
 - * Long depth-type filter life
- * Easy installation and filter servicing
- * Patented proven product 5271850
- * Greatly reduces oil and fuel contamination levels
 - * Environmentally friendly product
- * Less downtime and lower maintenance costs
- * Replace the filter every 4-6 months depending upon the water contamination and particulate levels.



Each 3-micron depth-type filter element will hold up to 1 LB of solids and/or absorb up to ½ quart of water.

Start using state of the art filter technology today!

How do the vent filters work?

As the tank and/or reservoir breathes the 3-micron cellulose depth-type filter traps the airborne solid contaminants and absorbs the moisture on a continuous basis resulting in cleaner drier fluids. Just replace the filter element once a year and enjoy cleaner fluids.

Who is using your vent filters?

Our vent filters are used across many different industries from pulp and paper mills on gear boxes and hydraulics to construction companies diesel fuel tanks to concrete manufacturing plants on hydraulic tanks. Where ever airborne contamination levels are high and the fluid needs to be ultra clean and water free. There are many places in these types of systems for fluid contamination to occur but you can at least eliminate a major source with a high quality vent filter.

US Patent #5271850




Vital Protection for Machines Since 1981



**PERFECT
FILTRATION**
SYSTEMS

FINALLY!!! A RESERVOIR VENT FILTER THAT IS ACTUALLY A FILTER

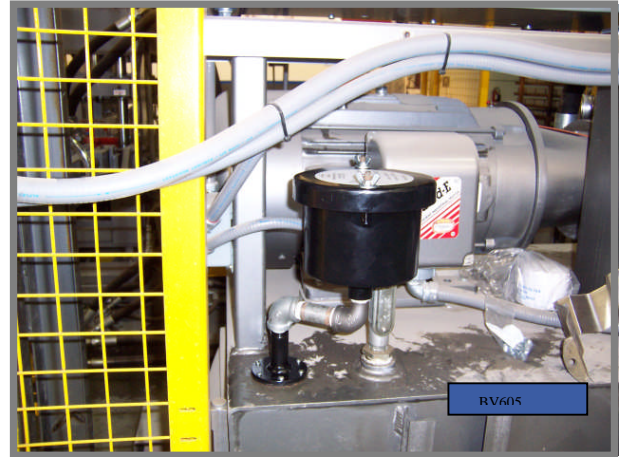

MODEL NUMBER	FILTER ELEMENT	MICRON RATING	WATER CAPACITY
BV605 (1" FPT)	7130	3-Micron	½ QUART
IF A LARGE VOLUME OF FLUID IS BEING RETURNED BACK INTO THE TANK AN ADDITIONAL FILTER MAYBE REQUIRED			
*Removes water and solids at a major contamination source * Expect cleaner drier fluids			



**PERFECT
FILTRATION**
SYSTEMS

Perfect Filtration Systems, Inc.
2711 Airport Road, Suite 6
Plant City, FL 33563

Phone 800-864-7855

Fax 813-659-2435

Email: sales@perfectfiltration.com

www.perfectfiltration.com